



Special features

- For general purpose
- Strain gauge measuring system
- Tension / Compression
- Made of high-grade stainless steel or aluminium (0.05 – 5 kN)
- Small dimensions
- It can be delivered with a built-in signal conditioner – see [EMS21](#)

Specifications


Parameter	Value			Unit
Rated capacity (F_n)	0.05	0.1, 0.2, 0.5	1, 2, 5, 10, 20, 50	kN
Overload				
- Safe	130			% F_n
- Ultimate	150			% F_n
- Permanent static load ¹	75			% F_n
- Dynamic load ¹	50			% F_n
Nominal sensitivity (C_n)	1.0 ± 2 %		1.5 ± 2 %	mV/V
Zero balance	2			% F.S.
Max error				
- Non-linearity	0.5	0.25		% F.S.
- Hysteresis	0.5	0.25		% F.S.
Temperature effect				
- On zero	0.1			% F.S./10 °C
- On output	0.1			% F.S./10 °C
Bridge resistance				
- Input	395 ± 20		375 ± 20	Ω
- Output	350 ± 10		350 ± 10	Ω
Insulation Impedance	> 500			MΩ
Excitation ²				
- Recommended	5 ... 7		7 ... 10	V
- Maximal	10		15	V
Temperature range				
- Compensated	0 ... + 50			°C
- Operating	- 10 ... + 70			°C
Protection	IP54			
Cable				
- Type	LifYDY 4 x 0.05			
- Length	2			m
Construction	Aluminium		Stainless steel	

Notes:

1 Recommended value


2 DC or AC Voltage

Outline dimensions

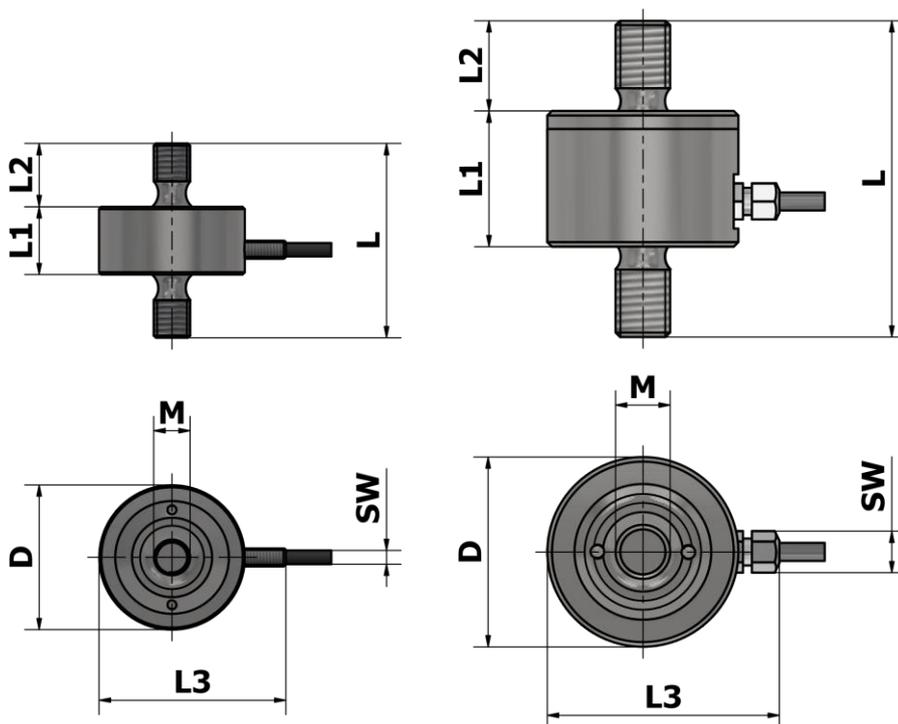

Rated capacity F_n (kN)	D mm	M mm	L mm	L1 mm	L2 mm	L3 mm	SW mm	Mass kg	Deflection, @ F_n (μm)
0.05	18	M4	24	10	7	24	Φ 3	0.04	30
0.1, 0.2, 0.5	28	M6	34	14	10	38	Φ 4	0.05	35
1, 2, 5	32	M8	43	15	14	42	Φ 4	0.1	45
10	38	M10	60	26	17	47	8	0.2	43
20	42	M12	70	30	20	51	8	0.3	56
50	50	M16	86	40	23	59	8	0.6	80

Recommended installation

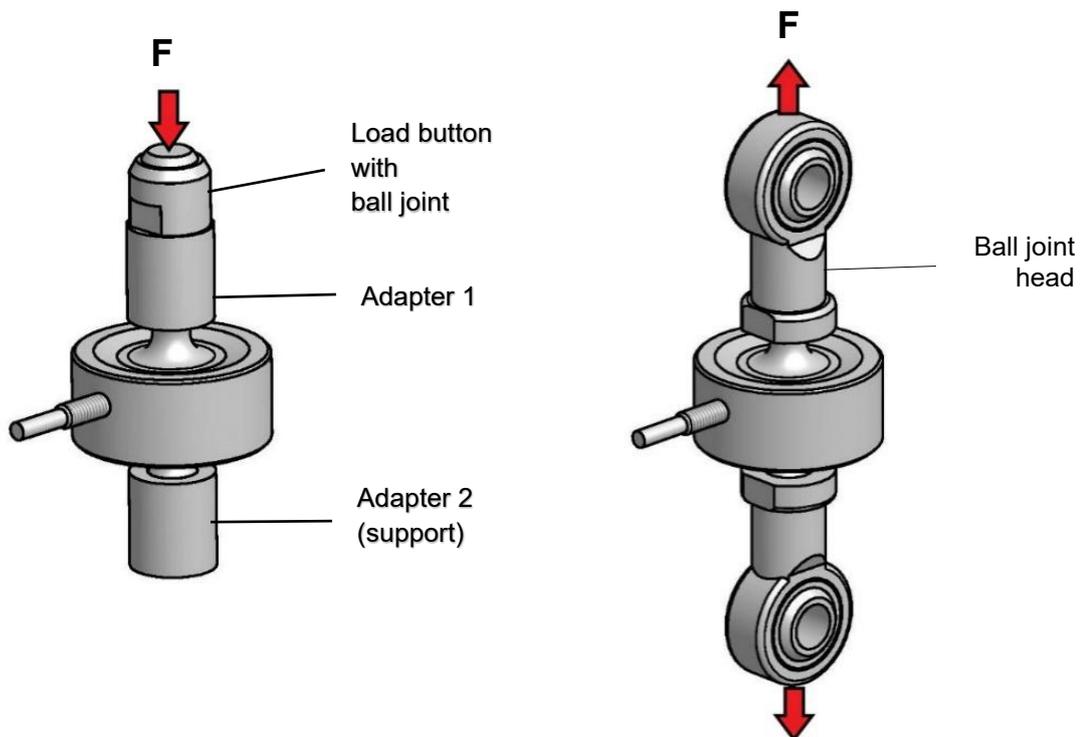


Direction of load COMPRESSION

Direction of load TENSION


Installation notes:

- The force must only act in the axis of the sensor.
- The sensor must be built in such a way that the force acts only through the threads. Adapter or the ball joint head must not touch the sensor body itself.

Sensor wiring colour code

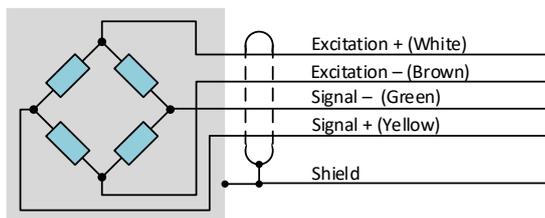


Sensor output characteristic

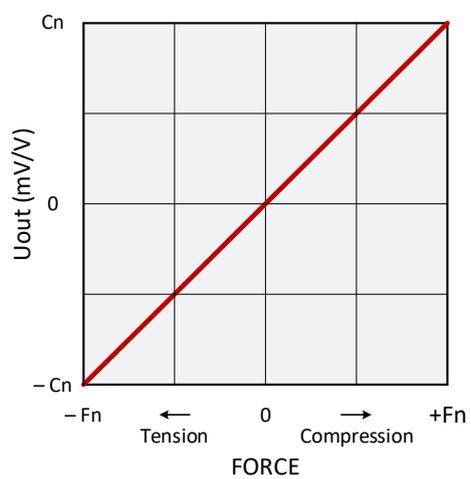


Wiring diagram, connection example to EMS169 signal conditioner

1. Load direction COMPRESSION, signal conditioner output positive (0 ... 10 V, 4 ... 20 mA)


Wiring diagram

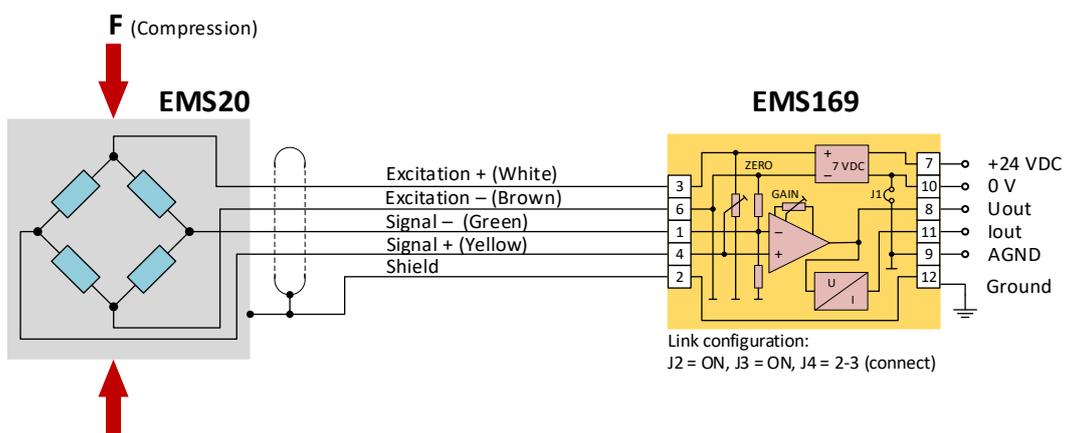

Output characteristics

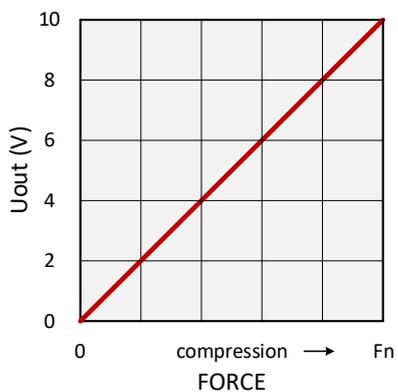


Uout vs. F

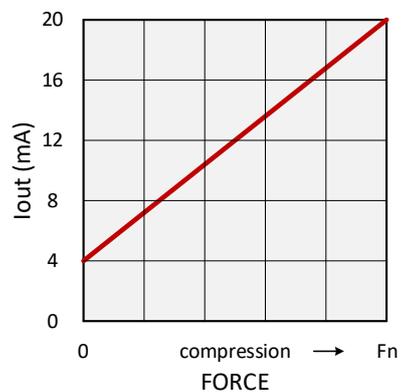


Iout vs. F

2. Load direction TENSION, signal conditioner output positive (0 ... 10 V, 4 ... 20 mA)


Wiring diagram

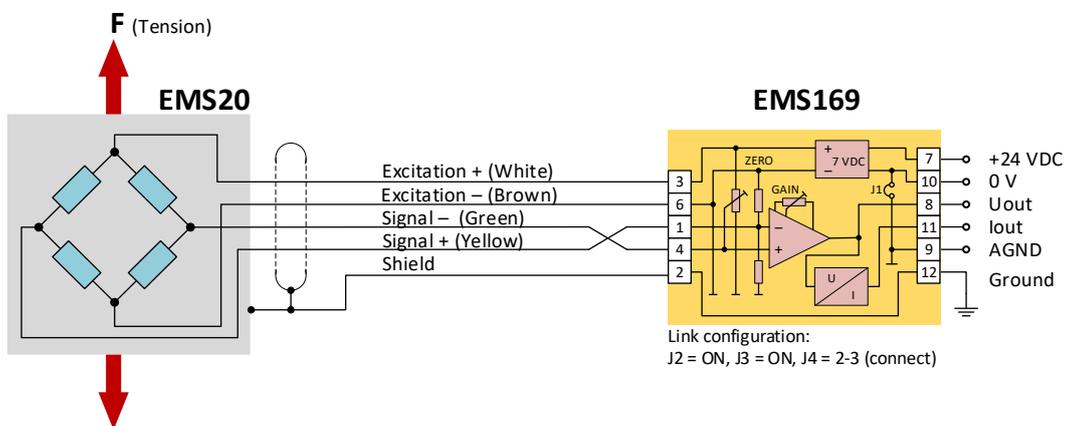

Output characteristics

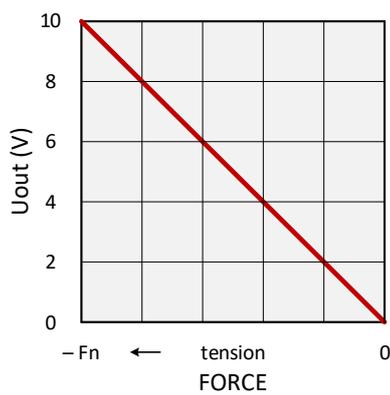

Uout vs. F

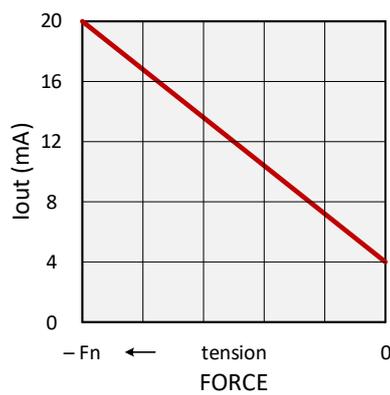


Iout vs. F


3. Load direction **COMPRESSION** and **TENSION**, signal conditioner output bipolar (± 10 V)

Note: The current output does not work in the negative range.

Wiring diagram

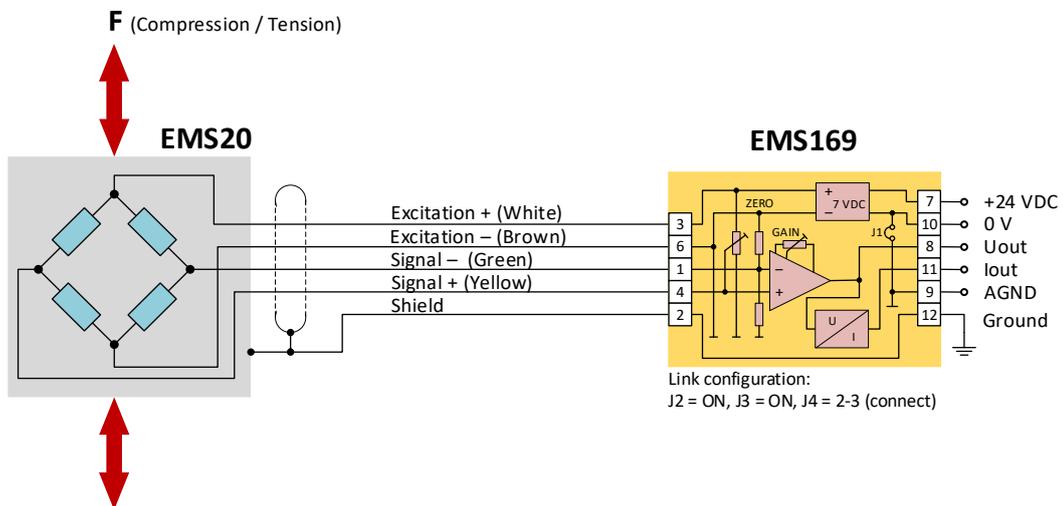


Output characteristic

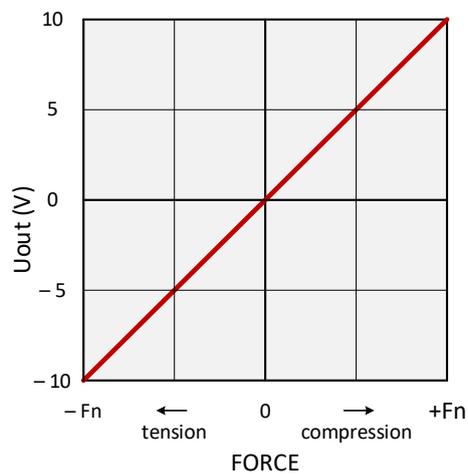


Uout vs. F

4. Load direction **COMPRESSION** and **TENSION**, signal conditioner output positive
 ($5 \pm 5 \text{ V}$, $12 \pm 8 \text{ mA}$)


Wiring diagram

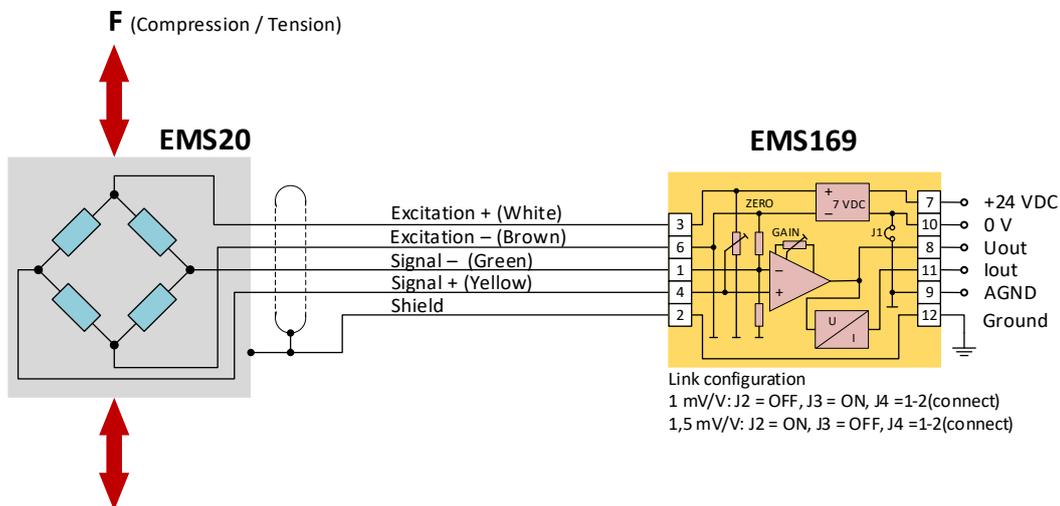

Output characteristics

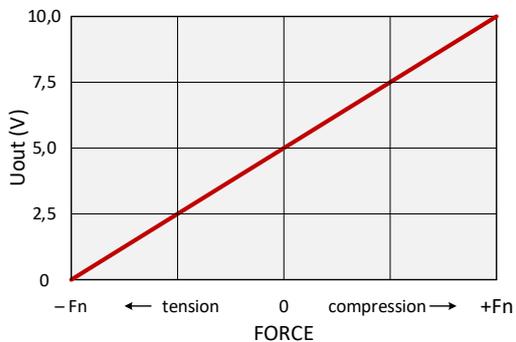


Uout vs. F

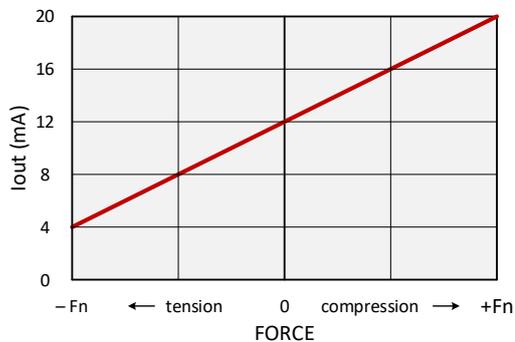

Iout vs. F

Parallel wiring diagram

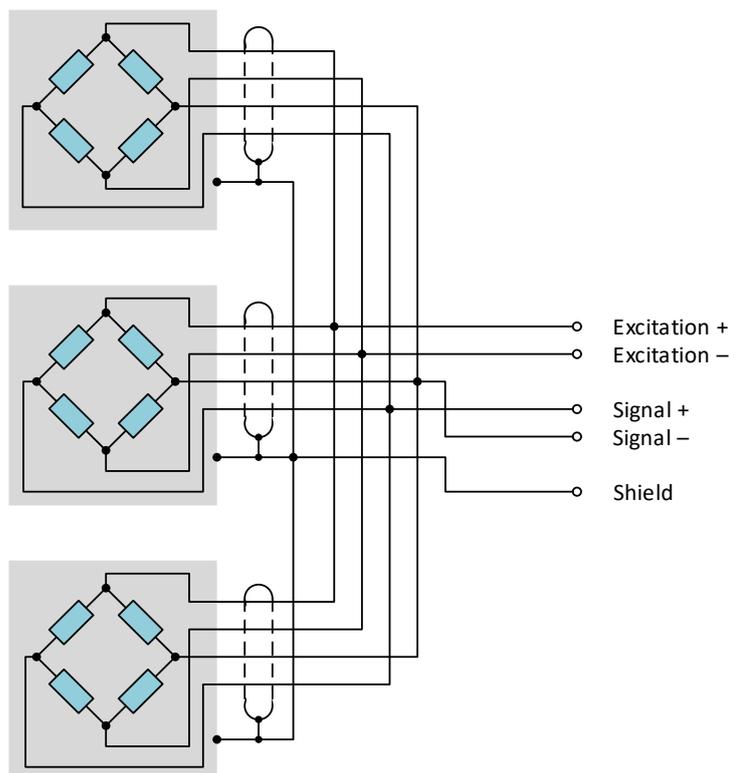

Legal information

The company EMSYST, spol. s r. o., registered office: Súvoz 111, 911 01 Trenčín, ID No.: 34 115 749, VAT No.: SK2020386115, registered in the Commercial Register maintained by the District Court Trenčín, section: Sro, file No.: 502/R (hereinafter referred to as the "Company"), hereby informs that any texts, descriptions, information, graphic and technical data contained in this document are subject to Company's copyright in accordance with the provisions of Act no. 185/2015 Coll. Author's of the Act, as amended. These materials are intended for customers of the Company and it is not possible to copy, modify or reproduce it without previous written consent of the Company.

The company further informs that any information that has been made available for customers, resulting from this document (primarily prices, technical know-how, or other special specification), relating to the Company's products and processes are the subject of a special trade secret of the Company and are subject to legal protection resulting from the provisions of § 17 et seq. Act No. 513/91 Coll. Commercial Code as amended.